

FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR ANTIFREEZE - WINDSCREEN - AdBlue® 20 bar

Equipped with:

- Black antistatic synthetic rubber EPDM hoses
- AISI 316 stainless steel connections
- Stainless steel 90° swivelling joint
- Viton® seals
- Stainless steel reel shaft



F-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1209-400	without hose	-	-	F1/2"G - M1/2"G
070-1209-410	10 m	1/2"	20 bar	F1/2"G - M1/2"G



F-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1309-400	without hose	-	-	F1/2"G - M1/2"G
070-1309-415	15 m	1/2"	20 bar	F1/2"G - M1/2"G



F-550

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1409-400	without hose	-	-	F1/2"G - M1/2"G
070-1409-500	without hose	-	-	F1"G - M3/4"G
070-1409-420	20 m	1/2"	20 bar	F1/2"G - M1/2"G
070-1409-425	25 m	1/2"	20 bar	F1/2"G - M 1/2"G
070-1409-510	10 m	3/4"	20 bar	F1"G - M3/4"G
070-1409-515	15 m	3/4"	20 bar	F1"G - M3/4"G




F-555

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1509-500	without hose	-	-	F1"G - M3/4"G
070-1509-520	20 m	3/4"	20 bar	F1"G - M3/4"G

OVERALL DIMENSIONS FIXED VERSION

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
F-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1

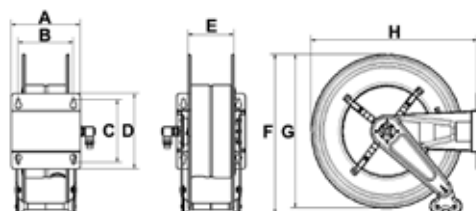

SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR ANTIFREEZE - WINDSCREEN - AdBlue® 20 bar

Equipped with:

- Black antistatic synthetic rubber EPDM hoses
- AISI 316 stainless steel connections
- Stainless steel 90° swivelling joint
- Viton® seals
- Stainless steel reel shaft

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-400
071-1209-400	without hose	-	-	F1/2"G - M1/2"G	
071-1209-410	10 m	1/2"	20 bar	F1/2"G - M1/2"G	



Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-460
071-1309-400	without hose	-	-	F1/2"G - M1/2"G	
071-1309-415	15 m	1/2"	20 bar	F1/2"G - M1/2"G	



Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-550
071-1409-400	without hose	-	-	F1/2"G - M1/2"G	
071-1409-500	without hose	-	-	F1"G - M3/4"G	
071-1409-420	20 m	1/2"	20 bar	F1/2"G - M1/2"G	
071-1409-425	25 m	1/2"	20 bar	F1/2"G - M 1/2"G	
071-1409-510	10 m	3/4"	20 bar	F1"G - M3/4"G	
071-1409-515	15 m	3/4"	20 bar	F1"G - M3/4"G	



Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-555
071-1509-500	without hose	-	-	F1"G - M3/4"G	
071-1509-520	20 m	3/4"	20 bar	F1"G - M3/4"G	



OVERALL DIMENSIONS SWIVELLING VERSION

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	460	400	550	13,50<20,50	0,084	1
S-460	150	120	168	196	95	490	460	575	17,50<24,00	0,094	1
S-550	200	150	225	270	120	572	550	680	23,00<45,00	0,130	1
S-555	250	200	225	270	170	572	550	680	27,00<54,00	0,150	1

