

PLASTIC AUTOMATIC GROUNDING CABLE REELS WITH SWIVELLING BRACKET



ES-260MT


Article	Cable length	Type cable	Clamp
078-3450-615	15 m	1X6 mm ² H07V-K	without caliper

Automatic grounding cable reel Mod. ES-260MT

- Automatic spring rewinding
- Plastic outer casing
- Steel **swivelling wall bracket**
- User can stop the cable at the required length
- Unipolar yellow/green cable 15m X 6 mm²
- CE approved



078-3450-615	2,800	0,015	1
--------------	-------	-------	---

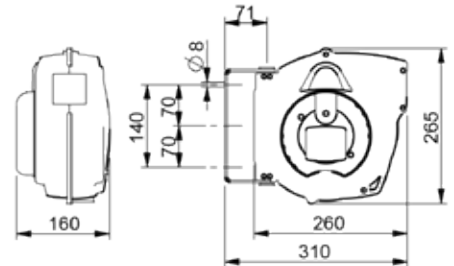

ES-260PT


Article	Cable length	Type cable	Clamp
078-3452-615	15 m	1X6 mm ² H07V-K	Grounding 80 A

Automatic grounding cable reel Mod. ES-260PT

- Automatic spring rewinding
- Plastic outer casing
- Steel **swivelling wall bracket**
- User can stop the cable at the required length
- Unipolar yellow/green cable 15m X 6 mm²
- **Grounding clamp 80 A**
- CE approved



078-3452-615	3,200	0,015	1
--------------	-------	-------	---

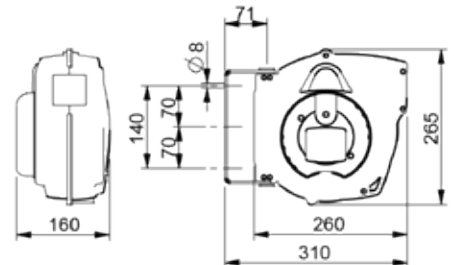

ES-260PTA


Article	Cable length	Type cable	Clamp
078-3454-615	15 m	1X6 mm ² H07V-K	Explosion - proof

Automatic grounding cable reel Mod. ES-260PTA

- Automatic spring rewinding
- Plastic outer casing
- Steel **swivelling wall bracket**
- User can stop the cable at the required length
- Unipolar yellow/green cable 15m X 6 mm²
- **Explosion - proof grounding clamp according to standard directive 94/9CE CESA 03 ATEX 101X** insulation voltage: 3kV - rated current: 10A
- CE approved



078-3454-615	3,800	0,023	1
--------------	-------	-------	---

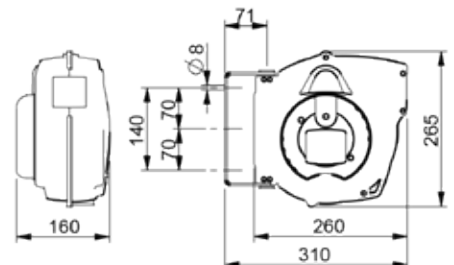

The grounding cable reel is used during the transfer of flammable liquids in order to avoid the accumulation of dangerous electrostatic charges