

FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR AIR-WATER 20 bar

Equipped with:

- Blue polyurethane ether-based hoses
- Nickel-plated brass or galvanized steel connections
- Brass 90° swivelling joint
- Viton® seals



F-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1201-300	without hose	-	-	F1/2"G - M3/8"G
070-1201-400	without hose	-	-	F1/2"G - M1/2"G
070-1201-215	15 m	8x12	20 bar	F1/2"G - M1/4"G gir.
070-1201-220	20 m	8x12	20 bar	F1/2"G - M1/4"G gir.
070-1201-310	10 m	10x14	20 bar	F1/2"G - M3/8"G
070-1201-315	15 m	10x14	20 bar	F1/2"G - M3/8"G
070-1201-410	10 m	13x19	20 bar	F1/2"G - M1/2"G




F-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1301-300	without hose	-	-	F1/2"G - M3/8"G
070-1301-400	without hose	-	-	F1/2"G - M1/2"G
070-1301-320	20 m	10X14	20 bar	F1/2"G - M3/8"G
070-1301-415	15 m	13X19	20 bar	F1/2"G - M1/2"G
070-1301-418	18 m	13X19	20 bar	F1/2"G - M1/2"G




F-550

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1401-400	without hose	-	-	F1/2"G - M1/2"G
070-1401-420	20 m	13X19	20 bar	F1/2"G - M1/2"G
070-1401-425	25 m	13X19	20 bar	F1/2"G - M1/2"G

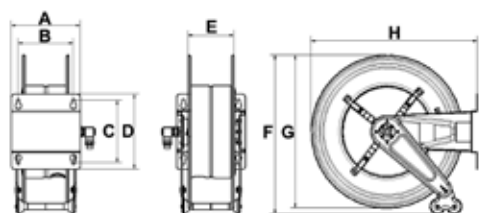


OVERALL DIMENSIONS FIXED VERSION


Mod.	A	B	C	D	E	F	G	H	Kg	m³	N°
F-400	158	120	168	192	95	460	400	435	15,90<17,90	0,084	1
F-460	158	120	168	192	95	490	460	490	17,40<20,74	0,094	1
F-550	200	150	225	270	120	590	550	600	23,50<28,00	0,130	1




Wall application with internal output hose



Wall application with external output hose



Wall and ceiling application with frontal output hose



Application bench with frontal output hose

SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR AIR-WATER 20 bar

Equipped with:

- Blue polyurethane ether-based hoses
- Nickel-plated brass or galvanized steel connections
- Brass 90° swivelling joint
- Viton® seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
071-1201-300	without hose	-	-	F1/2"G - M3/8"G
071-1201-400	without hose	-	-	F1/2"G - M1/2"G
071-1201-215	15 m	8x12	20 bar	F1/2"G - M1/4"G gir.
071-1201-220	20 m	8x12	20 bar	F1/2"G - M1/4"G gir.
071-1201-310	10 m	10x14	20 bar	F1/2"G - M3/8"G
071-1201-315	15 m	10x14	20 bar	F1/2"G - M3/8"G
071-1201-410	10 m	13x19	20 bar	F1/2"G - M1/2"G

S-400



Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
071-1301-300	without hose	-	-	F1/2"G - M3/8"G
071-1301-400	without hose	-	-	F1/2"G - M1/2"G
071-1301-320	20 m	10x14	20 bar	F1/2"G - M3/8"G
071-1301-415	15 m	13x19	20 bar	F1/2"G - M1/2"G
071-1301-418	18 m	13x19	20 bar	F1/2"G - M1/2"G

S-460





Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
071-1401-400	without hose	-	-	F1/2"G - M1/2"G
071-1401-420	20 m	13x19	20 bar	F1/2"G - M1/2"G
071-1401-425	25 m	13x19	20 bar	F1/2"G - M1/2"G

S-550




OVERALL DIMENSIONS SWIVELLING VERSION


Mod.	A	B	C	D	E	F	G	H	Kg	m³	N°
S-400	150	120	168	196	95	460	400	550	15,51<17,51	0,084	1
S-460	150	120	168	196	95	490	460	575	17,50<24,00	0,094	1
S-550	200	150	225	270	120	572	550	680	23,00<29,00	0,130	1

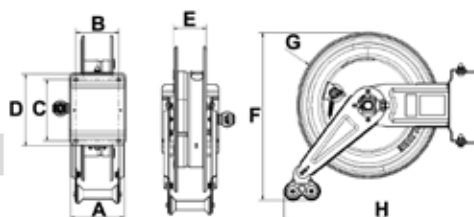


Wall application with
internal output hose



Wall application with
external output hose



Wall and ceiling application
with frontal outside hose



The insertion of the hose reel
in the wall bracket is with
quick disconnect coupling

FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR AIR-WATER FROM 20 TO 28 bar


Equipped with:

- Black synthetic rubber hoses R6, Galvanized steel connections
- Brass 90° swivelling joint, Viton® seals

F-400	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1201-300	without hose	-	-	F1/2"G - M3/8"G
	070-1201-400	without hose	-	-	F1/2"G - M1/2"G
	070-1202-212	12 m	5/16"	28 bar	F1/2"G - M1/4"G
	070-1202-218	18 m	5/16"	28 bar	F1/2"G - M1/4"G
	070-1202-310	10 m	3/8"	28 bar	F1/2"G - M3/8"G
	070-1202-315	15 m	3/8"	28 bar	F1/2"G - M3/8"G
	070-1202-410	10 m	1/2"	28 bar	F1/2"G - M1/2"G
F-460	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1301-300	without hose	-	-	F1/2"G - M3/8"G
	070-1301-400	without hose	-	-	F1/2"G - M1/2"G
	070-1302-318	18 m	3/8"	28 bar	F1/2"G - M3/8"G
	070-1302-320	20 m	3/8"	28 bar	F1/2"G - M3/8"G
	070-1302-415	15 m	1/2"	28 bar	F1/2"G - M1/2"G
	070-1302-418	18 m	1/2"	28 bar	F1/2"G - M1/2"G
F-550	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1401-400	without hose	-	-	F1/2"G - M1/2"G
	070-1402-500	without hose	-	-	F1"G - M3/4"G
	070-1402-420	20 m	1/2"	28 bar	F1/2"G - M1/2"G
	070-1402-425	25 m	1/2"	28 bar	F1/2"G - M1/2"G
	070-1402-515	15 m	3/4"	21 bar	F1"G - M3/4"G
F-555	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1502-400	without hose	-	-	F1/2"G - M1/2"G
	070-1502-500	without hose	-	-	F1"G - M3/4"G
	070-1502-600	without hose	-	-	F1"G - M1"G
	070-1502-430	30 m	1/2"	28 bar	F1/2"G - M1/2"G
	070-1502-520	20 m	3/4"	21 bar	F1"G - M3/4"G
	070-1502-615	15 m	1"	20 bar	F1"G - M1"G
F-560	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1602-400	without hose	-	-	F1/2"G - M1/2"G
	070-1602-500	without hose	-	-	F1"G - M3/4"G
	070-1602-600	without hose	-	-	F1"G - M1"G
	070-1602-440	40 m	1/2"	28 bar	F1/2"G - M1/2"G
	070-1602-530	30 m	3/4"	21 bar	F1"G - M3/4"G
	070-1602-540	40 m	3/4"	21 bar	F1"G - M3/4"G
	070-1602-620	20 m	1"	20 bar	F1"G - M1"G
	070-1602-630	30 m	1"	20 bar	F1"G - M1"G

OVERALL DIMENSIONS FIXED VERSION

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
F-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,240	1

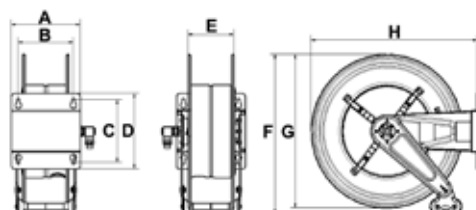

SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR AIR-WATER FROM 20 TO 28 bar

Equipped with:

- Black synthetic rubber hoses R6, Galvanized steel connections
- Brass 90° swivelling joint, Viton® seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-400
071-1201-300	without hose	-	-	F1/2"G - M3/8"G	
071-1201-400	without hose	-	-	F1/2"G - M1/2"G	
071-1202-212	12 m	5/16"	28 bar	F1/2"G - M1/4"G	
071-1202-218	18 m	5/16"	28 bar	F1/2"G - M1/4"G	
071-1202-310	10 m	3/8"	28 bar	F1/2"G - M3/8"G	
071-1202-315	15 m	3/8"	28 bar	F1/2"G - M3/8"G	
071-1202-410	10 m	1/2"	28 bar	F1/2"G - M1/2"G	


Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-460
071-1301-300	without hose	-	-	F1/2"G - M3/8"G	
071-1301-400	without hose	-	-	F1/2"G - M1/2"G	
071-1302-318	18 m	3/8"	28 bar	F1/2"G - M3/8"G	
071-1302-320	20 m	3/8"	28 bar	F1/2"G - M3/8"G	
071-1302-415	15 m	1/2"	28 bar	F1/2"G - M1/2"G	
071-1302-418	18 m	1/2"	28 bar	F1/2"G - M1/2"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-550
071-1401-400	without hose	-	-	F1/2"G - M1/2"G	
071-1402-500	without hose	-	-	F1"G - M3/4"G	
071-1402-420	20 m	1/2"	28 bar	F1/2"G - M1/2"G	
071-1402-425	25 m	1/2"	28 bar	F1/2"G - M1/2"G	
071-1402-515	15 m	3/4"	21 bar	F1"G - M3/4"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-555
071-1502-400	without hose	-	-	F1/2"G - M1/2"G	
071-1502-500	without hose	-	-	F1"G - M3/4"G	
071-1502-600	without hose	-	-	F1"G - M1"G	
071-1502-430	30 m	1/2"	28 bar	F1/2"G - M1/2"G	
071-1502-520	20 m	3/4"	21 bar	F1"G - M3/4"G	
071-1502-615	15 m	1"	20 bar	F1"G - M1"G	

OVERALL DIMENSIONS SWIVELLING VERSION

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	460	400	550	13,50<20,50	0,084	1
S-460	150	120	168	196	95	490	460	575	17,50<24,00	0,094	1
S-550	200	150	225	270	120	572	550	680	23,00<45,00	0,130	1
S-555	250	200	225	270	170	572	550	680	27,00<54,00	0,150	1

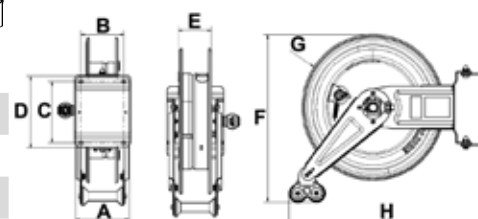

FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR OIL, ANTIFREEZE AND SIMILAR FLUIDS FROM 88 TO 160 bar

Equipped with:

- Black synthetic rubber hoses 1SC
- Galvanized steel connections
- Galvanized steel 90° swivelling joint
- Polyurethane seals

F-400	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1206-400	without hose	-	-	F1/2"G - M1/2"G
	070-1206-310	10 m	3/8"	180 bar	F1/2"G - M1/2"G
	070-1206-410	10 m	1/2"	160 bar	F1/2"G - M1/2"G

F-460	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1306-400	without hose	-	-	F1/2"G - M1/2"G
	070-1306-315	15 m	3/8"	180 bar	F1/2"G - M1/2"G
	070-1306-415	15 m	1/2"	160 bar	F1/2"G - M1/2"G
	070-1306-418	18 m	1/2"	160 bar	F1/2"G - M1/2"G


F-550	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1406-400	without hose	-	-	F1/2"G - M1/2"G
	070-1406-500	without hose	-	-	F1"G - M3/4"G
	070-1406-420	20 m	1/2"	160 bar	F1/2"G - M1/2"G
	070-1406-425	25 m	1/2"	160 bar	F1/2"G - M1/2"G
	070-1406-515	15 m	3/4"	105 bar	F1"G - M3/4"G

F-555	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1506-400	without hose	-	-	F1/2"G - M1/2"G
	070-1506-500	without hose	-	-	F1"G - M3/4"G
	070-1506-600	without hose	-	-	F1"G - M1"G
	070-1506-430	30 m	1/2"	160 bar	F1/2"G - M1/2"G
	070-1506-520	20 m	3/4"	105 bar	F1"G - M3/4"G
	070-1506-615	15 m	1"	88 bar	F1"G - M1"G

F-560	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	070-1606-400	without hose	-	-	F1/2"G - M1/2"G
	070-1606-500	without hose	-	-	F1"G - M3/4"G
	070-1606-600	without hose	-	-	F1"G - M3/4"G
	070-1606-440	40 m	1/2"	160 bar	F1"G - M3/4"G
	070-1606-525	25 m	3/4"	105 bar	F1"G - M3/4"G
	070-1606-530	30 m	3/4"	105 bar	F1"G - M3/4"G
	070-1606-620	20 m	1"	88 bar	F1"G - M1"G
	070-1606-630	30 m	1"	88 bar	F1"G - M1"G

OVERALL DIMENSIONS FIXED VERSION

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
F-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,240	1

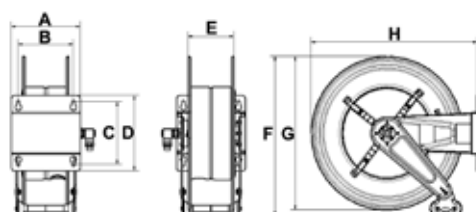

SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR OIL, ANTIFREEZE AND SIMILAR FLUIDS FROM 88 TO 160 bar

Equipped with:

- Black synthetic rubber hoses 1SC
- Galvanized steel connections
- Galvanized steel 90° swivelling joint
- Polyurethane seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-400
071-1206-400	without hose	-	-	F1/2"G - M1/2"G	
071-1206-310	10 m	3/8"	180 bar	F1/2"G - M1/2"G	
071-1206-410	10 m	1/2"	160 bar	F1/2"G - M1/2"G	


Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-460
071-1306-400	without hose	-	-	F1/2"G - M1/2"G	
071-1306-315	15 m	3/8"	180 bar	F1/2"G - M1/2"G	
071-1306-415	15 m	1/2"	160 bar	F1/2"G - M1/2"G	
071-1306-418	18 m	1/2"	160 bar	F1/2"G - M1/2"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-550
071-1406-400	without hose	-	-	F1/2"G - M1/2"G	
071-1406-500	without hose	-	-	F1"G - M3/4"G	
071-1406-420	20 m	1/2"	160 bar	F1/2"G - M1/2"G	
071-1406-425	25 m	1/2"	160 bar	F1/2"G - M1/2"G	
071-1406-515	15 m	3/4"	105 bar	F1"G - M3/4"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-555
	without hose				
071-1506-400	without hose	-	-	F1/2"G - M1/2"G	
071-1506-500	without hose	-	-	F1"G - M3/4"G	
071-1506-600		-	-	F1"G - M1"G	
071-1506-430	30 m	1/2"	160 bar	F1/2"G - M1/2"G	
071-1506-520	20 m	3/4"	105 bar	F1"G - M3/4"G	
071-1506-615	15 m	1"	88 bar	F1"G - M1"G	

OVERALL DIMENSIONS SWIVELLING VERSION

Mod.	A	B	C	D	E	F	G	H	 Kg	 m³	
S-400	150	120	168	196	95	460	400	550	13,50<20,50	0,084	1
S-460	150	120	168	196	95	490	460	575	17,50<24,00	0,094	1
S-550	200	150	225	270	120	572	550	680	23,00<45,00	0,130	1
S-555	250	200	225	270	170	572	550	680	27,00<54,00	0,150	1

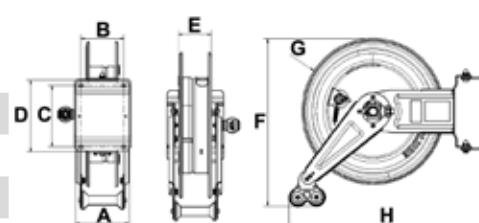

FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR GREASE FROM 275 TO 400 bar

Equipped with:

- Black synthetic rubber hoses 2SC
- Galvanized steel connections
- Galvanized steel 90° swivelling joint
- Polyurethane seals



F-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1207-200	without hose	-	-	M1/4"G - M1/4"G
070-1207-300	without hose	-	-	M3/8"G - M3/8"G
070-1207-400	without hose	-	-	M1/2" - M1/2"
070-1207-110	10 m	1/4"	400 bar	M1/4"G - M1/4"G
070-1207-115	15 m	1/4"	400 bar	M1/4"G - M1/4"G
070-1207-310	10 m	3/8"	330 bar	M3/8"G - M3/8"G
070-1207-410	10 m	1/2"	275 bar	M1/2"G - M1/2"G



F-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1307-200	without hose	-	-	M1/4"G - M1/4"G
070-1307-300	without hose	-	-	M3/8"G - M3/8"G
070-1307-400	without hose	-	-	M1/2"G - M1/2"G
070-1307-118	18 m	1/4"	400 bar	M1/4"G - M1/4"G
070-1307-315	15 m	3/8"	330 bar	M3/8"G - M3/8"G
070-1307-415	15 m	1/2"	275 bar	M1/2"G - M1/2"G




F-550

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1407-300	without hose	-	-	M3/8"G - M3/8"G
070-1407-400	without hose	-	-	M1/2"G - M1/2"G
070-1407-320	20 m	3/8"	330 bar	M3/8"G - M3/8"G
070-1407-325	25 m	3/8"	330 bar	M3/8"G - M3/8"G
070-1407-420	20 m	1/2"	275 bar	M1/2"G - M1/2"G
070-1407-425	25 m	1/2"	275 bar	M1/2"G - M1/2"G



F-555

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-1507-300	without hose	-	-	M3/8"G - M3/8"G
070-1507-400	without hose	-	-	M1/2"G - M1/2"G
070-1507-330	30 m	3/8"	330 bar	M3/8"G - M3/8"G
070-1507-430	30 m	1/2"	275 bar	M1/2"G - M1/2"G

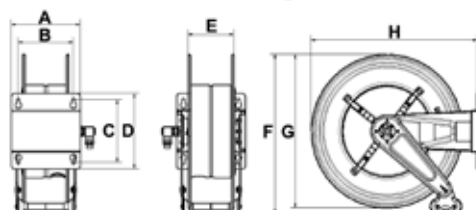

OVERALL DIMENSIONS FIXED VERSION

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
F-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,130	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,150	1

SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR GREASE FROM 275 TO 400 bar

Equipped with:

- Black synthetic rubber hoses 2SC
- Galvanized steel connections
- Galvanized steel 90° swivelling joint
- Polyurethane seals

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-400
071-1207-200	without hose	-	-	M1/4"G - M1/4"G	
071-1207-300	without hose	-	-	M3/8"G - M3/8"G	
071-1207-400	without hose	-	-	M1/2" - M1/2"	
071-1207-110	10 m	1/4"	400 bar	M1/4"G - M1/4"G	
071-1207-115	15 m	1/4"	400 bar	M1/4"G - M1/4"G	
071-1207-310	10 m	3/8"	330 bar	M3/8"G - M3/8"G	
071-1207-410	10 m	1/2"	275 bar	M1/2"G - M1/2"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-460
071-1307-200	without hose	-	-	M1/4"G - M1/4"G	
071-1307-300	without hose	-	-	M3/8"G - M3/8"G	
071-1307-400	without hose	-	-	M1/2"G - M1/2"G	
071-1307-118	18 m	1/4"	400 bar	M1/4"G - M1/4"G	
071-1307-315	15 m	3/8"	330 bar	M3/8"G - M3/8"G	
071-1307-415	15 m	1/2"	275 bar	M1/2"G - M1/2"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-550
071-1407-300	without hose	-	-	M3/8"G - M3/8"G	
071-1407-400	without hose	-	-	M1/2"G - M1/2"G	
071-1407-320	20 m	3/8"	330 bar	M3/8"G - M3/8"G	
071-1407-325	25 m	3/8"	330 bar	M3/8"G - M3/8"G	
071-1407-420	20 m	1/2"	275 bar	M1/2"G - M1/2"G	
071-1407-425	25 m	1/2"	275 bar	M1/2"G - M1/2"G	

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet	S-555
071-1507-300	without hose	-	-	M3/8"G - M3/8"G	
071-1507-400	without hose	-	-	M1/2"G - M1/2"G	
071-1507-330	30 m	3/8"	330 bar	M3/8"G - M3/8"G	
071-1507-430	30 m	1/2"	275 bar	M1/2"G - M1/2"G	

OVERALL DIMENSIONS SWIVELLING VERSION

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	460	400	550	13,50<20,50	0,084	1
S-460	150	120	168	196	95	490	460	575	17,50<24,00	0,094	1
S-550	200	150	225	270	120	572	550	680	23,00<45,00	0,130	1
S-555	250	200	225	270	170	572	550	680	27,00<54,00	0,150	1

