

# FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR WATER 150 °C 200 bar

Equipped with:

- Blue no trace synthetic rubber hoses 1SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

| F-400 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1205-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1205-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1204-210 | 10 m         | 5/16"  | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1204-215 | 15 m         | 5/16"  | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1204-310 | 10 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1204-410 | 10 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

| F-460 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1305-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1305-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1304-220 | 20 m         | 5/16"  | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1304-315 | 15 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1304-318 | 18 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1304-415 | 15 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

| F-550 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1405-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1405-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1404-320 | 20 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1404-325 | 25 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1404-420 | 20 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |
|       | 070-1404-425 | 25 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

| F-555 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1505-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1505-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1504-330 | 30 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1504-430 | 30 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

| F-560 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1605-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1604-340 | 40 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1604-350 | 50 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
|       | 070-1604-440 | 40 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

## OVERALL DIMENSIONS FIXED VERSION

| Mod.  | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| F-400 | 158 | 120 | 168 | 192 | 95  | 460 | 400 | 435 | 12,50<19,50                                                                           | 0,084                                                                                 | 1                                                                                     |
| F-460 | 158 | 120 | 168 | 192 | 95  | 490 | 460 | 490 | 16,50<23,00                                                                           | 0,094                                                                                 | 1                                                                                     |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00                                                                           | 0,130                                                                                 | 1                                                                                     |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00                                                                           | 0,150                                                                                 | 1                                                                                     |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00                                                                           | 0,240                                                                                 | 1                                                                                     |



# SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR WATER 150 °C 200 bar

Equipped with:

- Blue no trace synthetic rubber hoses 1SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 071-1205-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 071-1205-400 | without hose | -      | -            | F1/2"G - M1/2"G |
| 071-1204-210 | 10 m         | 5/16"  | 200 bar      | F1/2"G - F3/8"G |
| 071-1204-215 | 15 m         | 5/16"  | 200 bar      | F1/2"G - F3/8"G |
| 071-1204-310 | 10 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 071-1204-410 | 10 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

**S-400**



| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 071-1305-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 071-1305-400 | without hose | -      | -            | F1/2"G - M1/2"G |
| 071-1304-220 | 20 m         | 5/16"  | 200 bar      | F1/2"G - F3/8"G |
| 071-1304-315 | 15 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 071-1304-318 | 18 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 071-1304-415 | 15 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

**S-460**



| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 071-1405-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 071-1405-400 | without hose | -      | -            | F1/2"G - M1/2"G |
| 071-1404-320 | 20 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 071-1404-325 | 25 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 071-1404-420 | 20 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |
| 071-1404-425 | 25 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

**S-550**




| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 071-1505-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 071-1505-400 | without hose | -      | -            | F1/2"G - M1/2"G |
| 071-1504-330 | 30 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 071-1504-430 | 30 m         | 1/2"   | 200 bar      | F1/2"G - F1/2"G |

**S-555**



## OVERALL DIMENSIONS SWIVELLING VERSION

| Mod.  | A   | B   | C   | D   | E   | F   | G   | H   | Kg          | m <sup>3</sup> | N° |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|----------------|----|
| S-400 | 150 | 120 | 168 | 196 | 95  | 460 | 400 | 550 | 13,50<20,50 | 0,084          | 1  |
| S-460 | 150 | 120 | 168 | 196 | 95  | 490 | 460 | 575 | 17,50<24,00 | 0,094          | 1  |
| S-550 | 200 | 150 | 225 | 270 | 120 | 572 | 550 | 680 | 23,00<45,00 | 0,130          | 1  |
| S-555 | 250 | 200 | 225 | 270 | 170 | 572 | 550 | 680 | 27,00<54,00 | 0,150          | 1  |

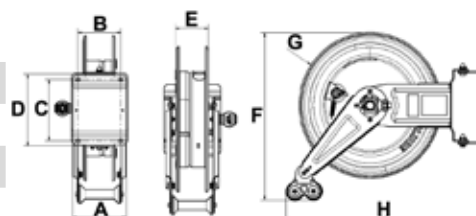

# FIXED AUTOMATIC HOSE REELS IN PAINTED STEEL FOR WATER 150 °C 400 bar

Equipped with:

- Blue no trace synthetic rubber hoses 2SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

| F-400 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1205-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1205-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1205-210 | 10 m         | 5/16"  | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1205-215 | 15 m         | 5/16"  | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1205-310 | 10 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1205-410 | 10 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |

| F-460 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1305-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1305-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1305-220 | 20 m         | 5/16"  | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1305-315 | 15 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1305-318 | 18 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1305-415 | 15 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |


| F-550 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1405-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1405-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1405-320 | 20 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1405-325 | 25 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1405-420 | 20 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |
|       | 070-1405-425 | 25 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |

| F-555 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1505-300 | without hose | -      | -            | F1/2"G - M3/8"G |
|       | 070-1505-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1505-330 | 30 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1505-430 | 30 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |

| F-560 | Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|-------|--------------|--------------|--------|--------------|-----------------|
|       | 070-1605-400 | without hose | -      | -            | F1/2"G - M1/2"G |
|       | 070-1605-340 | 40 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1605-350 | 50 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
|       | 070-1605-440 | 40 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |

## OVERALL DIMENSIONS FIXED VERSION

| Mod.  | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| F-400 | 158 | 120 | 168 | 192 | 95  | 460 | 400 | 435 | 12,50<19,50                                                                           | 0,084                                                                                 | 1                                                                                     |
| F-460 | 158 | 120 | 168 | 192 | 95  | 490 | 460 | 490 | 16,50<23,00                                                                           | 0,094                                                                                 | 1                                                                                     |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00                                                                           | 0,130                                                                                 | 1                                                                                     |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00                                                                           | 0,150                                                                                 | 1                                                                                     |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00                                                                           | 0,240                                                                                 | 1                                                                                     |

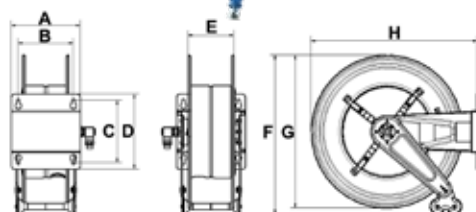

# SWIVELLING AUTOMATIC HOSE REELS IN PAINTED STEEL FOR WATER 150 °C 400 bar

Equipped with:

- Blue no trace synthetic rubber hoses 2SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    | S-400                                                                               |
|--------------|--------------|--------|--------------|-----------------|-------------------------------------------------------------------------------------|
| 071-1205-300 | without hose | -      | -            | F1/2"G - M3/8"G |  |
| 071-1205-400 | without hose | -      | -            | F1/2"G - M1/2"G |                                                                                     |
| 071-1205-210 | 10 m         | 5/16"  | 400 bar      | F1/2"G - F3/8"G |                                                                                     |
| 071-1205-215 | 15 m         | 5/16"  | 400 bar      | F1/2"G - F3/8"G |                                                                                     |
| 071-1205-310 | 10 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |                                                                                     |
| 071-1205-410 | 10 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |                                                                                     |

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    | S-460                                                                                |
|--------------|--------------|--------|--------------|-----------------|--------------------------------------------------------------------------------------|
| 071-1305-300 | without hose | -      | -            | F1/2"G - M3/8"G |  |
| 071-1305-400 | without hose | -      | -            | F1/2"G - M1/2"G |                                                                                      |
| 071-1305-220 | 20 m         | 5/16"  | 400 bar      | F1/2"G - F3/8"G |                                                                                      |
| 071-1305-315 | 15 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |                                                                                      |
| 071-1305-318 | 18 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |                                                                                      |
| 071-1305-415 | 15 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |                                                                                      |

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    | S-550                                                                                 |
|--------------|--------------|--------|--------------|-----------------|---------------------------------------------------------------------------------------|
| 071-1405-300 | without hose | -      | -            | F1/2"G - M3/8"G |  |
| 071-1405-400 | without hose | -      | -            | F1/2"G - M1/2"G |                                                                                       |
| 071-1405-320 | 20 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |                                                                                       |
| 071-1405-325 | 25 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |                                                                                       |
| 071-1405-420 | 20 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |                                                                                       |
| 071-1405-425 | 25 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |                                                                                       |

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    | S-555                                                                                 |
|--------------|--------------|--------|--------------|-----------------|---------------------------------------------------------------------------------------|
| 071-1505-300 | without hose | -      | -            | F1/2"G - M3/8"G |  |
| 071-1505-400 | without hose | -      | -            | F1/2"G - M1/2"G |                                                                                       |
| 071-1505-330 | 30 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |                                                                                       |
| 071-1505-430 | 30 m         | 1/2"   | 400 bar      | F1/2"G - F1/2"G |                                                                                       |

## OVERALL DIMENSIONS SWIVELLING VERSION

| Mod.  | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| S-400 | 150 | 120 | 168 | 196 | 95  | 460 | 400 | 550 | 13,50<20,50                                                                         | 0,084                                                                               | 1                                                                                     |
| S-460 | 150 | 120 | 168 | 196 | 95  | 490 | 460 | 575 | 17,50<24,00                                                                         | 0,094                                                                               | 1                                                                                     |
| S-550 | 200 | 150 | 225 | 270 | 120 | 572 | 550 | 680 | 23,00<45,00                                                                         | 0,130                                                                               | 1                                                                                     |
| S-555 | 250 | 200 | 225 | 270 | 170 | 572 | 550 | 680 | 27,00<54,00                                                                         | 0,150                                                                               | 1                                                                                     |

